



Product description

MASTERS POLYMER F-35 is a one-component adhesive sealant based on hybrid polymer with silane termination. It cures according with air moisture reaction. It is characterized by a good elasticity and a good springback that allows to support joints movement.

Specifications

- isocyanates and solvents free
- phthalates free
- anti-mold (according with ISO 846)
- permanent elasticity
- excellent surface hardness
- odorless
- great chromatic stability
- adhesive properties unchanged over time
- can be over-coated
- adhesion without primer
- great extrusion
- great UV resistance: UVB lamps > 5500 h

Application areas

It is suitable for gluing and sealing a large amount of surfaces such as:

- glass
- mirrors
- porcelain
- ceramics
- wood - MDF - chipboard
- bricks - concrete - plaster - plasterboard
- aluminium - anodized aluminum - varnished aluminum
- steel
- iron - lead - copper
- PVC - PP - PMMA (we suggest preliminary tests before the application)

Preparation and use

Conditions of use: use at a temperature between +5°C and +50°C - for a good performance of the product we suggest to use it at a temperature of 20°C.

It is advised to completely harden the product before painting. Considering the variety of brands and paints on the market, we recommend a preliminary test to verify the compatibility between sealant and paint before laying it.


Surface requirements: the surface should be dry, free of dust, oils, detergents and greases, once the surface has been cleaned, wait no more than 20 minutes for laying the product.

Tools for use: manual or pneumatic guns

Cleaning utensils: clean them with mineral turpentine

Spots and residues: remove non-crosslinked parts with mineral turpentine, hardened parts can only be removed mechanically.

Application example

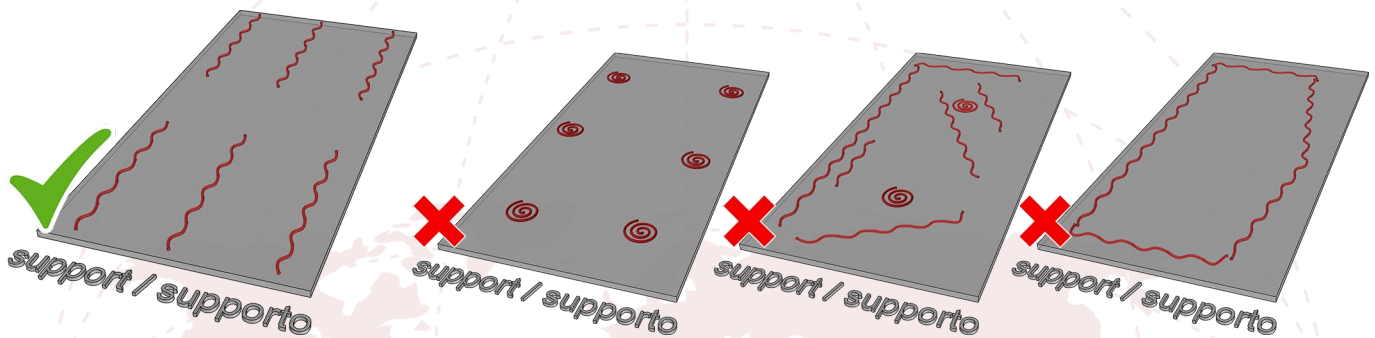

Package

cartridge 290 ml, box 12/24 pc
 unipac 600 ml, box 20 pc
 drums 25 kg
 drums 250 kg

Colours



Storage

Stored in its original packaging, in a cold dry place (+5°C and +25°C), away from direct sunlight, the product lasts 24 months.

Security measures

Avoid contact with mucous membranes and skin
 Use gloves to avoid irritation, especially in susceptible persons
 In case of contact with eyes, rinse with large amounts of water consult a doctor.
 Avoid to release the packages to the environment

Notes

These informations and our technical specifications, correspond to our experience but these not establish our guarantee in relationship with final

results or responsibility arising out of any legal report.

In view of the multiplicity of material handling and storage conditions, the conditions of production and use, all the above information and indications must be verified beforehand by the user in accordance with its specific conditions of use.

MASTERS POLYMER F-35 - Product data

| General characteristics | Inspection method | unit | Value |
|---|-------------------|----------------------|-----------|
| Uncured paste | | | |
| Density at 23°C | ISO 2811 | [g/cm ³] | 1,40 |
| Consistency | | | non-sag |
| Curing time at 23°C / 50 % r.h. | | [mm/24h] | 3 |
| Skin forming time at 23°C / 50 % r.h. | | [min] | 35 |
| Cured paste | | | |
| After 4 weeks storage at 23°C / 50% rh | | | |
| Tensile strength | ISO 37 | [N/mm ²] | 2,20 |
| Elongation at break | ISO 37 | [%] | 450 |
| Modulus at 100% elongation | ISO 37 | [N/mm ²] | 0,60 |
| Shear strength | ISO 37 | | 11,00 |
| Hardness Shore A | DIN 53505 | | 35 |
| Volume loss | | [%] | < -2 |
| Temperature resistance | | [°C] | -40 / +90 |

These figures are only intended as a guide and should not be used in preparing specifications.

The data presented in this medium are in accordance with the present state of our knowledge but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this medium should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The information provided by us does not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.

The management system has been certified according to DIN EN ISO 9001 and DIN EN ISO 14001

For technical, quality, or product safety questions, please contact:
 MASTICI VOTTERO s.n.c.
 10040 La Cassa (TO) - via Torino 44
 info@masticivottero.com
 www.masticivottero.com